

TECHNICAL SPECIFICATION SHEET | HEP/HCPE

HEP												
model	pump	flow		height		width		depth		weight		voltage
		1st-stage [cc/min]	2nd-stage [cc/min]	mm	in	mm	in	mm	in	kg	lb	
HEP200/12V	2 stage	1200	260	326	12 7/8	241	9 1/2	167	6 5/8	4.4	9.6	12
HEP200/24V	2 stage	2000	500	326	12 7/8	241	9 1/2	167	6 5/8	4.4	9.6	24


HEP

Silent
Modern, noiseless pump gives you silent operation.

Fast
Operates three times faster than a manual pump.

Compact design
Easy to install, even when space is limited.

Comfort
Specially designed for comfortable, push button sailing.

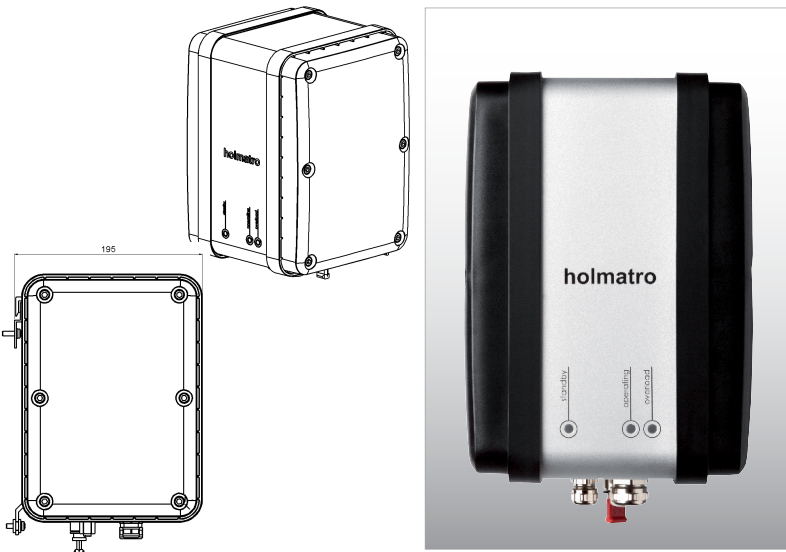


HCPE											
model	face plate	functions	height		width		depth		weight		
			mm	in	mm	in	mm	in	kg	lb	
HCPE	Clear	4	200	7 7/8	172	6 3/4	130	5 1/8	2.9	6.3	
HCPBE	Black	4	200	7 7/8	172	6 3/4	130	5 1/8	2.9	6.3	
HCPSSSE	Stainless Steel	4	200	7 7/8	172	6 3/4	130	5 1/8	3.4	7.4	
HCPCE	Carbon	4	200	7 7/8	172	6 3/4	130	5 1/8	2.8	6.1	

HCPE

Multi-function
A selector valve gives you effortless control of up to four functions with a HEP

Minimal dimensions
Compact design allows simple installation.
Custom configurations and dimensions on request.



Finish options
Clear anodised finish as standard. Optional offered in black anodised, stainless steel or carbon.